



**fitted with**

- work equipment**
- connected load**
- power consumption**
- luminous flux**
- luminous efficacy**
- light colour**
- color rendering index (CRI)**
- glare-free**
- system of protection**
- class of protection**
- technology**
- usage**
- luminaire body**
- weight (net)**
- mains lead**

- design**
- fastening**
- special features**

**LED**


- Energy efficiency category A+
- electronic plug-in transformer
- 100-240 V; 50/60 Hz
- approx. 14 W
- approx. 550 lm
- approx. 39 lm/W
- neutral white, approx. 5000 K
- > 80
- conical prismatic screen
- IP 20
- II
- continuously dimmable
- push button
- sectional aluminium, ESD-coat of lacquer, black
- approx. 0.9 kg
- approx. 4,0 m; mains plug
- CEE 7/XVI
- mounted version
- screw-down bracket; horizontal
- ESD version, pivot arm



CEE 7/XVI

**illuminance**

distance: 50 cm  
**Em:** 490 lx  
**Emax:** 1346 lx  
**Emin:** 84 lx

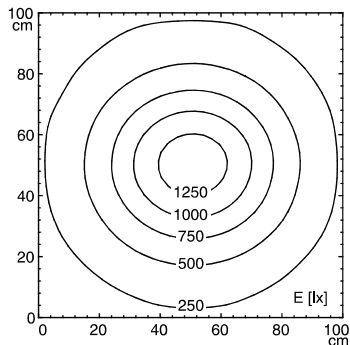

**luminous intensity**

